
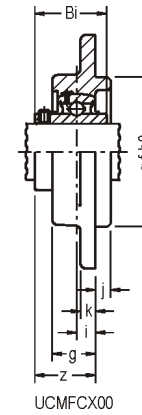


MFCX 00 (MFC) Mancal tipo Flange Serviço Médio

MFCX=MFC



Ø eixo mm pol	Caixa	Dimensão nominal (mm)										Paraf.
		a	p	e	i	s	j	k	g	f		
25 1	MFCX 05	111	92,1	65,1	7,9	10,0	6,4	10	19	76,200	M8 5/16	
30 1-3/16 1-1/4	MFCX 06	127	104,8	74,1	7,9	12,0	6,4	10	19	85,725	M10 3/8	
35 1-7/16 1-1/2 40	MFCX 07	133	111,1	78,6	7,9	12,0	6,4	10	19	92,075	M10 3/8	
1-11/16 1-3/4 45 2	MFCX 09	156	130,2	92,1	6,5	12,0	6,4	9	19	107,950	M10 3/8	
1-15/16 50 2	MFCX 10	162	136,5	96,5	7,1	12,0	6,4	12	21	114,300	M10 3/8	
55 2-3/16 2-1/4	MFCX 11	181	152,4	107,8	5,5	14,0	9,5	12	21	127,000	M12 1/2	
60 2-1/2 65	MFCX 12	194	165,1	116,7	3,3	14,0	12,7	10	21	139,700	M12 1/2	
60 2-7/16 2-1/2 65 2-3/4 70	MFCX 13	194	165,1	116,7	3,3	14,0	12,7	10	21	139,700	M12 1/2	
65 2-11/16 70	MFCX 14	222	190,5	134,7	6,4	19,0	12,7	12	25	161,925	M16 5/8	
2-15/16 75 3 80 3-3/16	MFCX 15	222	190,5	134,7	6,4	19,0	12,7	12	25	161,925	M16 5/8	
85 3-7/16 3-1/2 90	MFCX 17	260	219,1	154,9	10,9	23,0	12,7	14	29	187,325	M20 3/4	
95 100 3-15/16 4	MFCX 20 ⁽¹⁾	298	260,4	184,1	20,7	24,0	12,7	17	46	228,600	M22 7/8	

Peso (Kg) UCMFCX00	D	Rolamento UCX 00	
		z	Bi
1,40	62,0	30	38,1
1,50	72,0	33	42,9
1,70	80,0	38	49,2
2,70	90,0	39	51,6
3,00	100,0	40	55,6
3,40	110,0	45	65,1
4,30	120,0	43	65,1
4,90	125,0	48	74,6
6,50	130,0	51	77,8
6,80	140,0	56	82,6
10,00	160,0	67	96,0
19,50	190,0 200,0	89 83	117,5 103,0

⁽¹⁾ - montado com rolamento UC319 V22 FRM em lugar de UCX 00.